


| ITEM | PART NO. | DESCRIPTION | REQ. |
|------|----------|-------------|------|
|------|----------|-------------|------|

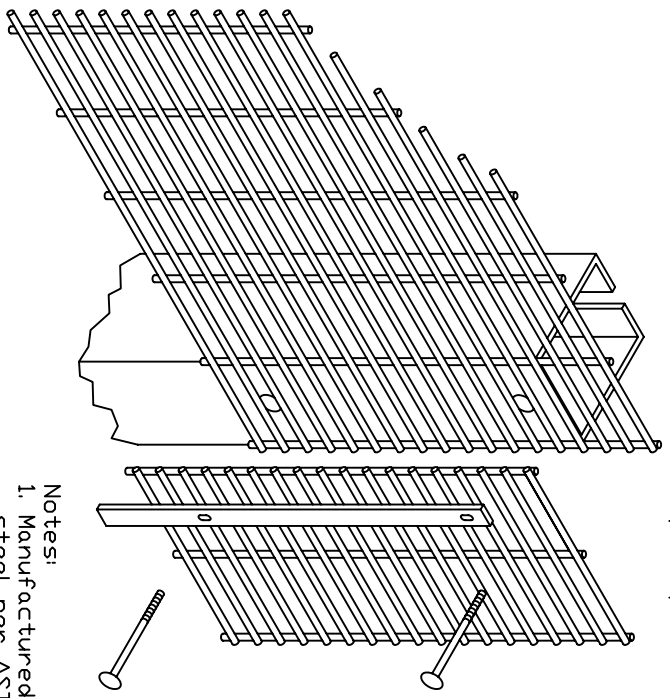

- Notes:
1. Manufactured from 60,000# min yield steel per ASTM A-470 and coated with minimum 2oz zinc per sq. foot per side conforming to ASTM 1043
 2. Wall thickness available in 0.150 and 0.130

IF IN DOUBT-ASK

| LTR | REVISION | ECN | APP | DATE |
|-----|----------|-----|-----|------|
|-----|----------|-----|-----|------|

| | | | | |
|---|-----------------------------------|--|-----------------------------------|--|
| THIS DRAWING IS THE PROPERTY OF RIVERDALE MILLS CORPORATION AND RIVERDALE MILLS CORPORATION AND PRINTERS PROPRIETARY INFORMATION PROTECTED BY COPYRIGHT AND/OR TRADE SECRET LAWS. NEITHER THIS DRAWING NOR ITS CONTENTS MAY BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS WITHOUT THE WRITTEN CONSENT OF RIVERDALE MILLS CORP. | | | | |
| TOLERANCE UNLESS SPECIFIED FRACTION DECIMAL ANGULAR 1/64 ±.005 ±1/2° | DRAWN DSS 06/27/01 | CHECKED RWM | DATE 06/27/01 | TITLE "C" POST STYLE LINE POST CONNECTION W/ CONTINUOUS BAR |
| MATERIAL NOTED | APPROVED RWM | PRODUCT MODEL FENCING | SCALE DID NOT SCALE DWG NTS | DWG NO. A-2482 |
| FINISH NEXT ASS'Y | SCALE DID NOT SCALE DWG NTS | DIMENSIONS SHOWN ARE AFTER PLATING OR FINISHING. | FILE: A-2482 | REV. |

