


ITEM	PART NO.	DESCRIPTION	REQ.
------	----------	-------------	------

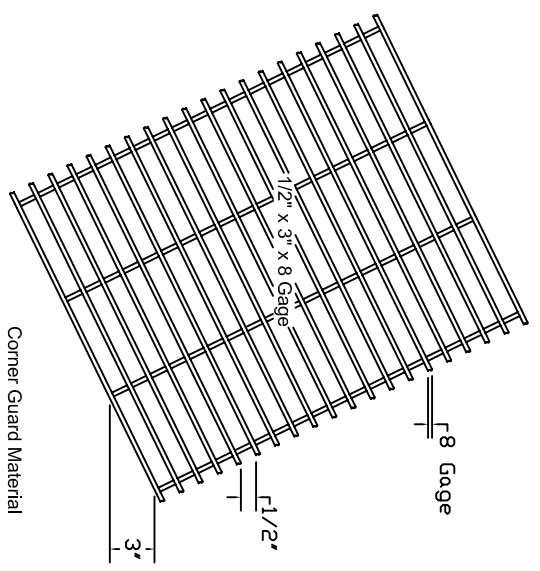

Welded Wire Corner Guards:
 Shall be fabricated from low carbon steel wire and electrically control welded, forming a specified mesh size. The wire shall conform to ASTM A 62 83,000 psi (572 MPa). After welding, the fabric is not dipped galvanized in accordance with ASTM A 123.

Vinyl Clad Fence Fabric on Polyester Coatings:
 Conforms to manufacturer's information, Riverdale Mills Corp. 1-800-762-6374. Cut and Climb Resist Top to Bottom of Fence 1/2" (13mm) x 3" (76mm) 8 gage fabric.

Fabrication:
 Fence heights exceeding 7' (21m) Guards are fabricated in sections to accommodate the specified heights and provide climb resistant protection. The angle and location of the berms will vary depending on where the corners and intersecting fence connections are made. Corner guards are secured in place with 5/16" (7.94mm) minimum diameter carriage bolts.

IF IN DOUBT - ASK

LTR		REVISION		ECN	APP	DATE
-----	--	----------	--	-----	-----	------

TOLERANCE UNLESS SPECIFIED		DRAWN	DSS	DATE	RIVERDALE RIVERDALE MILLS CORPORATION NORTHBRIDGE, MA 01534	
FRACTION	DECIMAL	CHECKED		10/07/01		
1/64	:.005	APPROVED				
MATERIAL NOTED		PRODUCT MODEL	TITLE			
FINISH		FENCING	1/2" X 8 GA. WIRE MESH			
NEXT ASS'Y		SCALE	DWG NO.			
DIMENSIONS SHOWN ARE AFTER PLATING OR FINISHING.		DD NOT SCALE DWG	A-2467			

THIS DRAWING IS THE PROPERTY OF RIVERDALE MILLS CORPORATION AND CONTAINS PROPRIETARY INFORMATION PROTECTED BY COPYRIGHT AND/OR TRADE SECRET LAWS. IT IS HEREBY DISCLOSED OR REPRODUCED BY ANY MEANS WHATSOEVER, WHILE OR IN PART, WITHOUT THE PRIOR, WRITTEN CONSENT OF RIVERDALE MILLS CORP.

FILE: A-2467